


COMPACT20



Speed Selector to operate with the tiller in the upright position

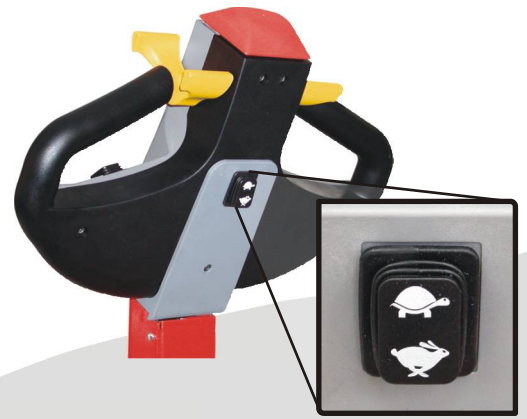

Also available in Cold Store Version -30°C



COMPACT AND HANDY



- Built-in high Frequency batteries charger
- Battery charge indicator with LCD hours counter and disabling of working hydraulics at low battery

Pegasolift 

CE

COMPACT20 SERIES

DIMENSIONS SCHEME		GENERAL SPECIFICATIONS	
	LAST UPDATE: 14/09/2011	MODEL	COMPACT20-SC
		Load capacity (Q)	2000 kg
		Weight without load and with lead batteries	349 kg
		Front rollers truck	485
		Rear balance wheel truck	545
		Chassis length	D01 450 mm
		Total length	D02 1600 mm
		Steering radius	R 1417 mm
		Working aisle width	Ast 1850 mm
		Single front rollers size	Poliurethane n° 2 rollers ø 80 × 90
		Double front rollers size (OPTIONAL)	Poliurethane n° 2+2 rollers ø 80 × 70
		Drive wheel size	Poliurethane ø 245×76
		Balance wheels size	Poliurethane ø 100 × 40
		Travel speed	with load 4,2 km/h without load 5,1 km/h
		Lifting speed	with load 0,072 m/s without load 0,110 m/s
		Lowering speed	with load 0,380 m/s without load 0,110 m/s
		Max Gradeability	with load 5,0% without load 10,0%
		Brake	Electromagnetic
		Electronic control type	Mosfet 24V 200A
		Traction motor power	Separate excite system 1200W
		Pump power motor	800W
		Noise	65 dB
		High frequency battery charger and traction battery equippable	24V 20A built-it 24V 150Ah (125 kg)



COMPACT20 is an agile and sturdy pallet truck, designed to work in limited environment which permits excellent manoeuvrability even at full load, thanks to its powerful motor and compact dimensions.

The switch to operate with the tiller in the upright position, placed on the control head, makes it simple to avoid sudden accelerations during delicate maneuvers, avoiding damage to the material being handled and to the pallet truck.

Battery discharge Indicator (BDI) with a LCD hour counter and disabling working hydraulics at low battery.

All the series can be equipped with various options as: Trail-proof (non-marking) rubber wheels and cold storage version -30°C.

www.pegasolift.com

Pegasolift

Via del Lavoro 14 - 37047 San Bonifacio (Verona - Italy)
Tel. (0039) 045/7665570 - Fax: (0039) 045/7665698
www.pegasolift.com

All the pallet trucks of COMPACT20 series are manufactured according to the EEC Directive 98/37/CE