

T14 INOX


PROTECTION
IP56

Tiller head with speed selector



- COMPLETELY MADE OF AISI 304 INOX STEEL
- PROTECTION GRADE IP56
- SUITABLE FOR COLD STORE -30°C

Emergency stop key with
protection grade IP56

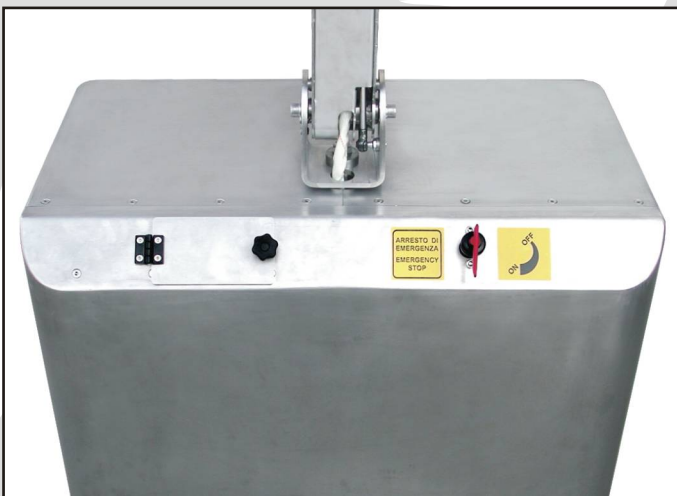

Internal high Frequency battery charger with sealed
watertight cover with protection grade IP56



Pegasolift 

CE

T14 INOX Series

DIMENSIONS SCHEME		GENERAL SPECIFICATIONS		
		MODEL	T14 INOX	
		Load capacity (Q)	1400 kg	
		Weight without load and with GEL batteries	282 kg	
		Front rollers truck	460	
		Rear balance wheel truck	575	
		Double front rollers size	n° 2+2 rollers ø 80 × 50 (polyurethane)	
		Traction wheel size	ø 245 × 76 (trail-proof soft polyurethane)	
		Balance wheel size	ø 100 × 40 (polyamide 6 + polyurethane)	
		Travel speed	with load	4,2 km/h
			without load	5,1 km/h
		Lifting speed	with load	0,072 m/s
			without load	0,110 m/s
		Lowering speed	with load	0,380 m/s
			without load	0,110 m/s
		Max gradeability	with load	5,0%
			without load	10,0%
Brake	Electromagnetic			
Electronic control type	Mosfet 24V 110A			
Traction motor power	700W (permanent magnets)			
Pump motor power	800W			
Battery charger built-in	High Frequency 24V 10A			
Noise	65 dB			
BATTERIES AVAILABLE				
n° 2 GEL Batteries 12V - 100Ah/20h			58 kg	

The high-efficiency and compact help

The T14 INOX pallet truck is designed to be compact, handy and easy to use for every user.

Made of AISI 304 INOX steel, is suitable to be used for the internal movement of alimentary and pharmaceutical goods; is produced with IP56 protection grade to make easier washing it also with water jet.

Equipped with drive wheel ring in trail-proof soft polyurethane with carved tread, it granted the best traction and adherence also on wet floor.



www.pegasolift.com

Pegasolift

Via del Lavoro 14 - 37047 San Bonifacio (Verona - Italy)
Tel. (0039) 045/7665570 - Fax: (0039) 045/7665698
www.pegasolift.com

CE All the pallet trucks of T14 series are manufactured according to the EEC Directive 98/37/CE