

T14 INOX


PROTECTION
IP56

Tiller head with speed selector



- COMPLETELY MADE OF AISI 304 INOX STEEL
- PROTECTION GRADE IP56
- SUITABLE FOR COLD STORE -30°C

Emergency stop key with
protection grade IP56

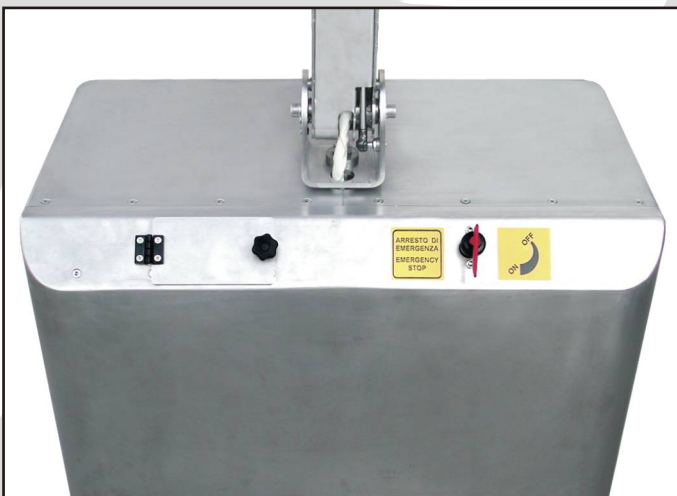

Internal high Frequency battery charger with sealed
watertight cover with protection grade IP56



Pegasolift 

CE

T14 INOX Series

DIMENSIONS SCHEME		GENERAL SPECIFICATIONS	
	MODEL		T14 INOX
	Load capacity (Q)		1400 kg
	Weight without load and with GEL batteries		282 kg
	Front rollers truck		460
	Rear balance wheel truck		575
	Double front rollers size		n° 2+2 rollers ø 80 × 50 (polyurethane)
	Traction wheel size		ø 245 × 76 (trail-proof soft polyurethane)
	Balance wheel size		ø 100 × 40 (polyamide 6 + polyurethane)
	Travel speed		with load 4,2 km/h without load 5,1 km/h
	Lifting speed		with load 0,072 m/s without load 0,110 m/s
	Lowering speed		with load 0,380 m/s without load 0,110 m/s
	Max gradeability		with load 5,0% without load 10,0%
	Brake		Electromagnetic
	Electronic control type		Mosfet 24V 110A
	Traction motor power		700W (permanent magnets)
Pump motor power		800W	
Battery charger built-in		High Frequency 24V 10A	
Noise		65 dB	
BATTERIES AVAILABLE			
n° 2 GEL Batteries 12V - 100Ah/20h			58 kg

The high-efficiency and compact help

The T14 INOX pallet truck is designed to be compact, handy and easy to use for every user.

Made of AISI 304 INOX steel, is suitable to be used for the internal movement of alimentary and pharmaceutical goods; is produced with IP56 protection grade to make easier washing it also with water jet.

Equipped with drive wheel ring in trail-proof soft polyurethane with carved tread, it granted the best traction and adherence also on wet floor.



www.pegasolift.com

Pegasolift

Via del Lavoro 14 - 37047 San Bonifacio (Verona - Italy)
Tel. (0039) 045/7665570 - Fax: (0039) 045/7665698
www.pegasolift.com



All the pallet trucks of T14 series are manufactured according to the EEC Directive 98/37/CE