

TOPP22

TOPP30



Quick Battery Change version




Speed Selector for slow/fast speed



Also available in Cold Store Version -30°C



Protected instruments and shelf box

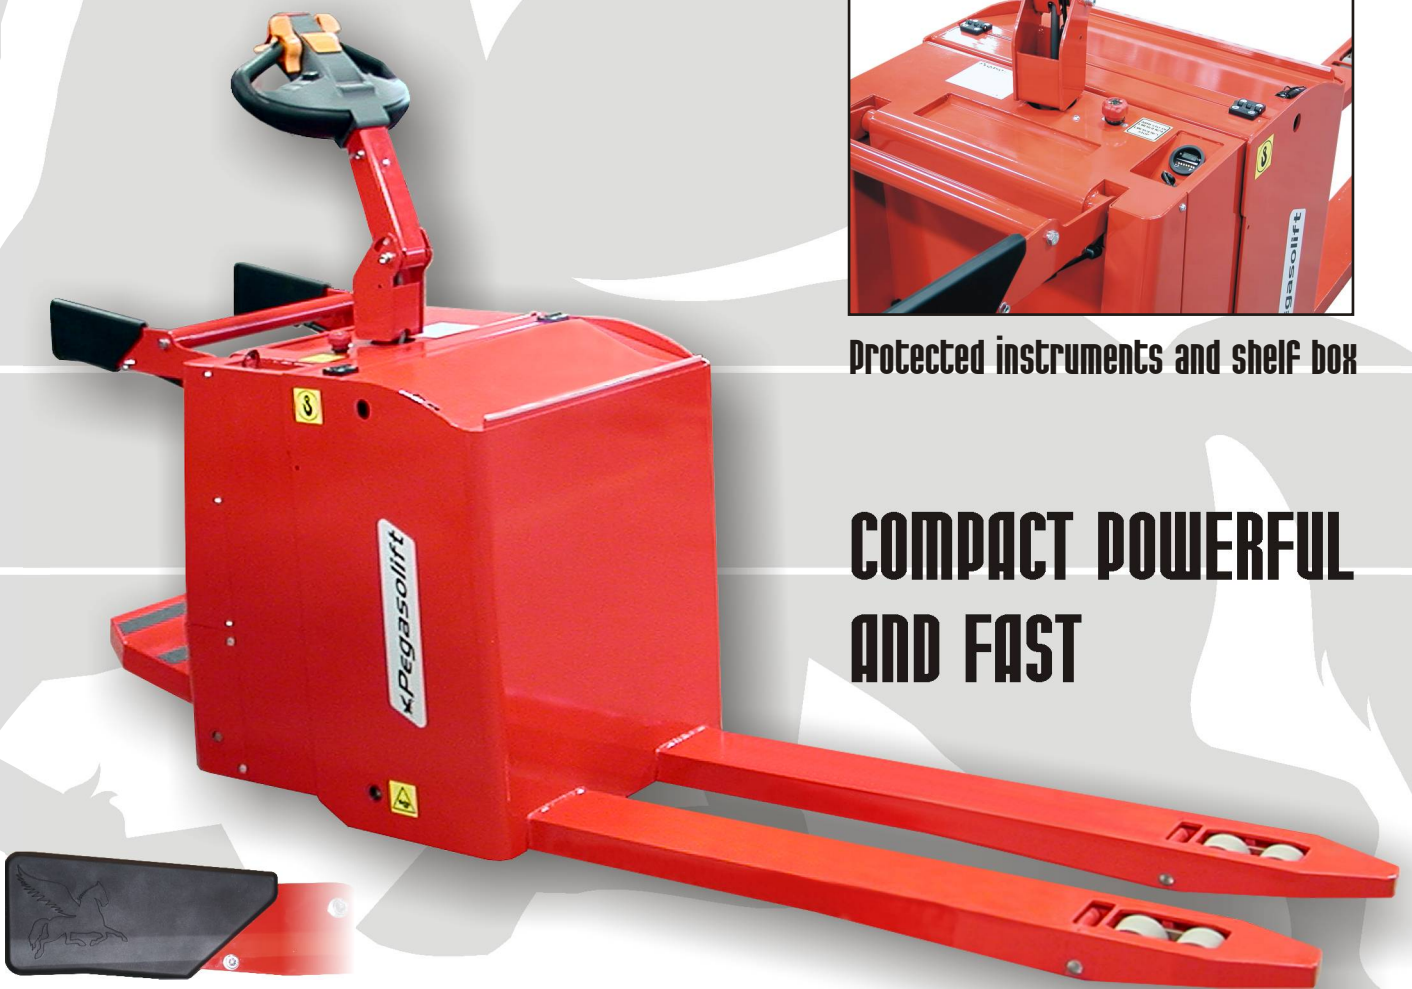

Side arms with rubber protection and platform retractable integrated in the rear cover

**COMPACT POWERFUL
AND FAST**


Pegasolift 

CE

TOPP22 and TOPP30 (Heavy Series with platform)

DIMENSIONS SCHEME

LAST UPDATE: 22/07/2011

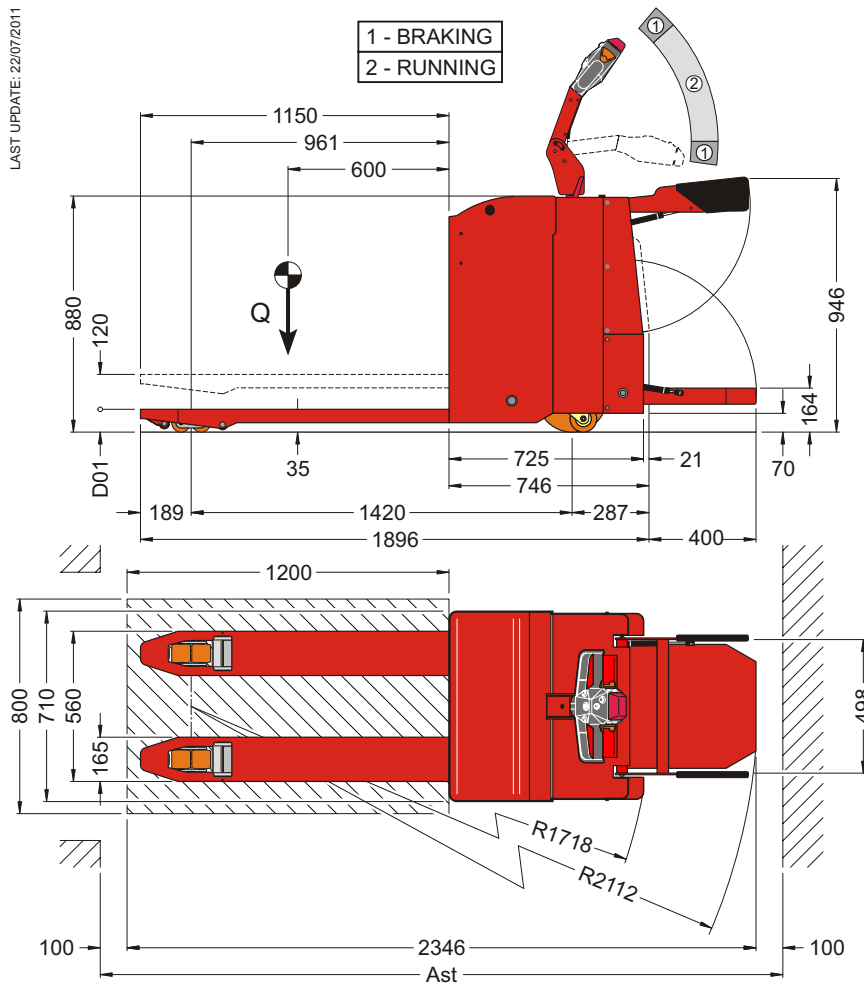

GENERAL SPECIFICATIONS

MODEL	TOPP22	TOPP30
Load capacity	2200 kg	3000 kg
Weight (without battery)	421 kg	448 kg
Track width - front	465	
Track width - rear	538	
Height of tiller arm in working position (brake releasing)	min 1082	max 1335
Height from ground of the lowered forks	D01 85	90
Aisle width (with platform and side arms retracted)	Ast = 2146	
Aisle width (with platform and side arms deployed)	Ast = 2546	
Single front rollers size	polyurethane $\varnothing 80 \times 90$	not available
Double front rollers size	polyurethane $\varnothing 80 \times 70$	$\varnothing 85 \times 70$
Traction wheel size	polyurethane $\varnothing 230 \times 75$	$\varnothing 253 \times 100$
Additional wheels size	polyurethane $\varnothing 100 \times 40$	
Service brake	Electromagnetic	
Electronic control type	Mosfet 24V 350A	
Drive motor rating	Potenza S2 60 min. 2000 W	2600 W
Lifting motor rating	Potenza S3 15% 2000 W	
Travel speed	with load 8,0 (6,0) ¹ km/h	without load 10,0 (6,0) ¹ km/h
Lifting speed	with load 0,0240 m/s	without load 0,0370 m/s
Lowering speed	with load 0,0315 m/s	without load 0,0340 m/s
Max gradeability (5 min.)	with load 10,0%	without load 20,0%
Battery compartment size (L x W x H)	292 x 650 x 640	

BATTERY AVAILABLE

Lead/acid traction battery 24V 315 Ah/5h	260 kg
Lead/acid traction battery 24V 345 Ah/5h	275 kg
Lead/acid traction battery 24V 375 Ah/5h	290 kg
GEL traction battery 24V 285 Ah/5h	260 kg
GEL traction battery 24V 330 Ah/5h	299 kg

- Powered pallet trucks with folding platform and side arms.
- Dual purpose machine for pedestrian and rider operation
- MOSFET electronic control on traction
- Separate excited drive motors

TOPP22 and TOPP30 are machines designed for the handling of goods on long distance, thanks to an excellent acceleration and to the high speed reached by the powerful drive motors. During the manoeuvres in limited space are able to obtain excellent results in terms of agility thanks to its reduced dimensions and to the retractable platform integrated in the rear cover.

Optional: trail-proof rubber wheel, cold store version -30°C, lateral door for quick battery change and battery charger indicator with LCD hours counter and block of the forks with flat battery.

PegasoLift

Via del Lavoro 14 - 37047 San Bonifacio (Verona - Italy)
Tel. (0039) 045/7665570 - Fax: (0039) 045/7665698
www.pegasolift.com

¹ Value in parenthesis () shown for rider operation with platform and side arms retracted (6/6 km/h)