



Technical Specifications

| Description | | LEDD12,5/ 20 MP | | |
|----------------------------|---|-----------------|--------|-------------|
| Distinguishing mark | Drive | | | Electric |
| | Operator type | | | Pedestrian |
| | Load capacity | Q | t | 2.0 |
| | Load centre distance | C | mm | 600 |
| | Load distance | X | mm | 950 |
| Weight | Service weight | | kg | 530 |
| | Axle loading, load front/rear | | kg | 1127 / 1703 |
| | Axle loading, unload front/rear | | kg | 656 / 174 |
| Tyres, Chassis | Tyres | | | Vulkollan |
| | Drive Wheel | | mm | ø230 x 80 |
| | Load Wheel | | mm | ø85 / 78 |
| | Support Wheel | | mm | ø125 x 50 |
| | Tread, front | | mm | 358 |
| | Tread, rear | | mm | 468 |
| Dimensions | Lift | h3 | mm | 120 |
| | Height of Tiller in drive position | h14 | mm | 1225 |
| | Height, lowered | h13 | mm | 85 |
| | Overall length | l1 | mm | 2280 |
| | Length to face of forkes | l2 | mm | 982 |
| | Overall width | b1 | mm | 700 |
| | Fork dimensions | e / l | mm | 160 / 1150 |
| | Distance between fork-arms | b5 | mm | 520 |
| | Groundclearance, centre of wheelbase | m2 | mm | 25 |
| | Aisle width for pallets, 800x1200 mm, along | Ast | mm | 2444 |
| | Turning radius | Wa | mm | 2190 |
| Performance data | Travel speed, load / unload | | km/h | 8 / 9,5 |
| | Travel speed, walking | | km/h | 5 |
| | turn silent runing speed- Option | | km/h | 6 |
| | Gradeability, load / unload | | % | 6 / 8 |
| Electric-engine | AC - Drive motor | | kW | 2.5 |
| | DC - Lift motor | | kW | 2.2 |
| | Battery acc. to DIN 43535 A / B / C / no | | | DIN B |
| | Battery voltage / nominal capacity | K5 | V / Ah | 24 / 375 |
| | Battery weight | | kg | 300 |
| | Impuls control for drive | | | impuls |

Product and specifications are subject to improvement and change without notice

Mast Specifications LEDD 12,5/20 MP

| Lifting height mm (h3) | Closed height mm (h1) | Capacity at height kg |
|---------------------------|--------------------------|--------------------------|
| 1790 | 1332 | 1250 |
| 2090 | 1532 | 1250 |

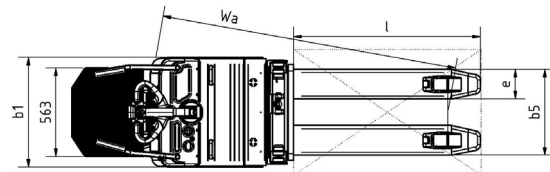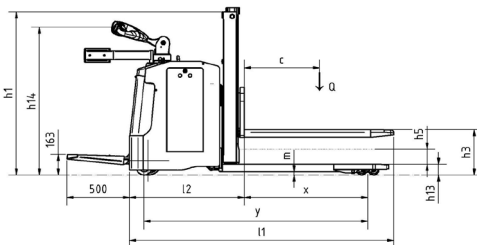

European Office: Doosan Industrial Vehicle Europe NV
 Europark Noord 36 A, 9100 Sint-Niklaas, Belgium
 Tel: +3237600987
 Fax: +3237600989
 Web site: <http://www.doosaneurope.com>



Electric Double Pallet Stacker

LEDD 20MP

2,000kg Capacity

The all new Doosan LEDD 20MP Series offers you

**The best solution...
for your material handling!**

Made in
Germany

Design Features

- Powerful AC drive motor providing high speed for use in warehouses and on ramps
- Low energy consumption and easy maintenance
- Narrow aisle width
- Great manoeuvrability with small turning radius

Operating Elements

- Multifunctional, ergonomical handles
- Turtle mode for precise operations in small areas

Standard Equipment

- AC controlled drive contactorless electronics
- Tandem Vulkollan load wheels
- Large Vulkollan drive tyre

Options

- Various fork dimensions (length and width)
- Cold store model (down to -30°C)
- Multifunctional display
- Stainless steel models for food industry

